






When building a staircase we are often faced with the problem of safeguarding the edge of steps which is the most vulnerable area and more subject to wear and tear. STAIRTEC edge profile can cover up damage after the laying, protect as well as replenish the decorative tone of the staircase because it blends well with most covering materials.

For the application of the profile we recommend the use suitable screws and dowels.



stairtec™ AE

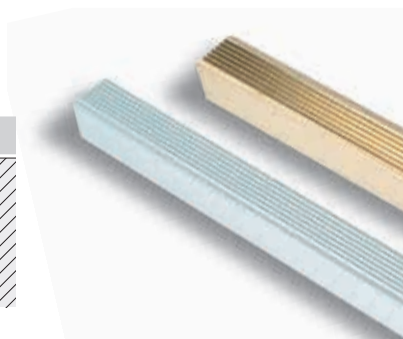

STAIRTEC AE-OLN Polished Extruded Brass

Stair nosing profile to apply to finished floors, anti-slip ribbed top surface for safety. To cover and refurbish step edges of staircase. Suitable for intense pedestrian transit.

| | BxH | Art. | | |
|------------------------|-------|------|----|-----|
| Material: | 21x21 | AE | 21 | OLN |
| Extruded brass | 30x30 | AE | 30 | OLN |
| Finish: Polished (OLN) | | | | |
| Length: 2,70 metres | | | | |

STAIRTEC AE 21 A*N Extruded anodised aluminium

Extruded aluminium stair nosing profile available in three standard colour finishes – ideal for steps with limited pedestrian transit. In case of heavier transit we recommend the silver tone finish.

Available in Silver (ASN), Gold (AON) or Bronze finish (ABN).

| | | | | |
|---|-------|----|----|-----|
| Material: | 21x21 | AE | 21 | ASN |
| Extruded anodised aluminium | 21x21 | AE | 21 | AON |
| Finish*: Silver (ASN), Gold (AON), Bronze (ABN) | 21x21 | AE | 21 | ABN |
| Length: 2,70 metres | | | | |