




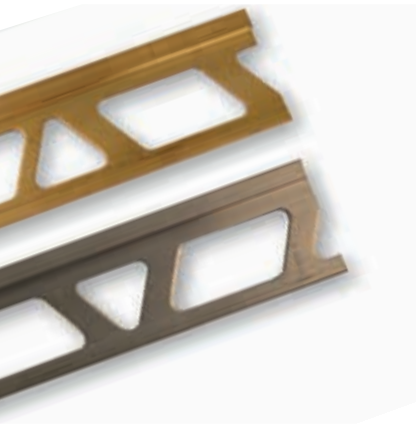

linetec™ MB

LINETEC MB split joint profile is utilized for two joining floor coverings which are laid in traditional mortar bed. It is usually employed with marble coverings because it can bear grinding, yet still enhances the decorative effect. It is available in brass and aluminium in 5 and 10 mm widths which can bear grinding/polishing treatment during the laying process.



LINETEC MB-ON Brass Natural

This brass profile is developed with prime choice raw material in order to guarantee tolerance and endurance to chemical and mechanical solicitations. It is primarily applied on both indoor and outdoor floors and can bear intense transit areas as well as for detailing elegant residential coverings. Through contact with moisture or corrosive media, brass may oxidize on exposed surfaces. This situation can be easily solved by buffing the product with a conventional polisher to return to its original shine.

LINETEC MB 5 AN Natural aluminium

This profile is developed in conformity with UNI standards. It has little tolerance to mechanical or chemical solicitation. During installation excess adhesive and grout should be removed immediately to avoid stains. The exposed surface may change colour or darken in time. Outdoors or where higher stresses are involved the use of brass profiles is recommended.

	BxH	Art.		
Material:	5x25	MB	5	ON
Extruded Brass	10x25	MB	10	ON
Finish: Natural (ON)				
Length: 2,70 metres				
Width: 5 mm a 10 mm				

Material:	5x25	MB	5	AN
Extruded Aluminium				
Finish: Natural (AN)				
Length: 2,70 metres				
Width: 5 mm				